


低压水气软管 SURELINE

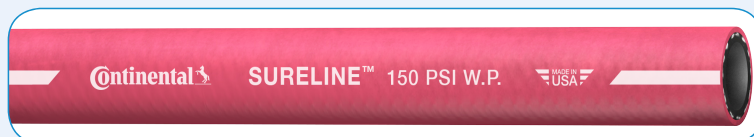

应用:

- 本产品可广泛用于那些需要采用一般性用途胶管的工业、建筑和农业领域的排水作业

技术参数:

- 内层: Versigard合成橡胶, RMA分级, C等级 (有限耐油性)
- 增强层: 螺旋缠绕的合成纱
- 外层: 黑色或红色的Versigard合成橡胶
- 工作温度: -40° C到99° C

Applications:

- For a wide range of industrial, construction, and agricultural water discharge applications in which a general service water hose is needed

Technical description:

- Tube: EPDM synthetic rubber, RMA Class
- Reinforcement: Spiral synthetic yarn
- Cover: Red or black EPDM synthetic rubber
- Temperature: -40°C to 99°C

低压水气软管 SURELINE

产品编码 No.	内径		外径 mm	工作压力 bar	重量 kg/m	包装长度 m
	in	mm				
HS-20026443	1/4"	6.4	12.2	10.3	0.12	152.40
HS-20026459	3/8"	9.5	16.8	10.3	0.19	152.40
HS-20026447	1/2"	12.7	19.8	10.3	0.25	152.40
HS-20026448	5/8"	15.9	23.6	10.3	0.39	152.40
HS-20026451	3/4"	19.1	27.4	10.3	0.49	152.40
HS-20026454	1"	25.4	35.3	10.3	0.77	137.16
HS-20026455	1-1/4"	31.8	41.4	10.3	0.85	121.92
HS-20026456	1-1/2"	38.1	47.8	10.3	1.01	91.44